

STORM & SCREEN DOORS





QUALITY, CRAFTSMANSHIP, STYLE AND INNOVATION

Andersen® storm and screen doors offer style options to enhance and complement the entryway of any home. Designed with ease of use in mind — whether buying, installing or owning — Andersen offers a solution to meet your needs.

A STYLE FOR EVERY HOME



Fullview Interchangeable

Let in the maximum amount of light and air while beautifully framing your entryway. See pages 4-7.



Fullview Retractable

Let in an abundance of light while benefiting from convenient, anytime ventilation without removing a glass panel. See pages 8-11.



3/4 Light Panel Ventilating

Enhance your entryway with a classic look at an exceptional value with a solid, lower embossed panel. See pages 12-14.



1/2 Light Panel Ventilating

The ½ light panel offers traditional style with a solid, lower embossed panel.
See pages 12-14.



LuminAire® Retractable Screen Door

SlideAway® insect screen system designed to disappear when not in use. See page 15.



THE ANDERSEN DIFFERENCE



Quality Hardware

Customize your storm door with a variety of hardware options. Select a finish and style that complements the look of your home.



Reinforced Corners

Built-to-last* construction featuring reinforced metal corner brackets helps the door corners stay square over time for long-lasting smooth operation.



Quick Change

Change from insect screen to full glass panel in less than a minute with a simple flip of the handle.



Retractable **Insect Screen**

Enjoy convenient anytime ventilation with a retractable insect screen that rolls into the door frame and out of view when not in use.



SmoothControl Plus™ **Close System**

Our built-in dual close system is 50% stronger than standard dual closers.** It has an advanced two part operation for a smoother close motion and a more consistent latch.



SplineLoc® **Insect Screen**

Has 3X more holding strength than our standard insect screen and a minimal center mullion bar for maximum durability.†



Time-Saving Installations


Andersen has taken the hassle out of installing a storm door. Install with confidence with our easy and convenient installation systems. See page 16 for details.

^{*}Visit andersenwindows.com/warranty for details.

^{**}Consistent complete door closure when compared to standard pneumatic dual closers.

†Visit andersenwindows.com/warranty for details. For demonstration purposes only, do not do this at home.

10 SERIES FULLVIEW INTERCHANGEABLE

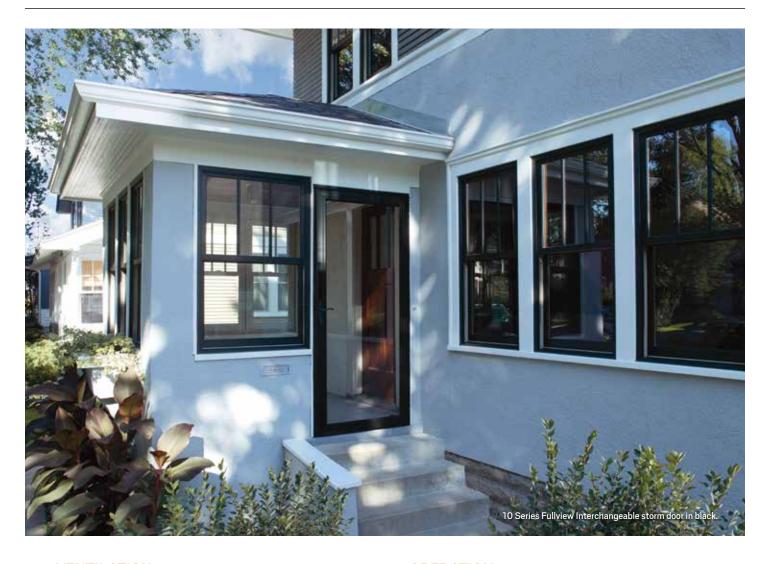


VENTILATION

Our Innovative Quick Change System allows you to go from full ventilation with our SpineLoc® Insect Screen to full glass in less than a minute with a simple flip of the handle.









Carefully store the panel when not in use.

OPERATION

For advanced operation, this door includes our new SmoothControl Plus™ Close System. The built-in dual closer system allows for more consistent latching and a smoother close motion. It also has an easy-to-use hold-open feature and simple close speed adjustment.







- 50% stronger than standard dual closers*
- Commercial-grade steel closer arm
- More consistent latch
- Easy to use hold-open feature
- Simple close speed adjustment

SECURITY

Built-in keyed deadbolt secures the door to the frame.

Choose laminated glass for added security. Doors with laminated glass include a 3-point lock built into the top, middle and bottom of the frame and shatter-resistant laminated glass.

Note: Doors with laminated glass are not compatible with an insect screen.

HARDWARE OPTIONS*

Bold name denotes finish shown.



MODERN Brushed Dark Nickel **Brushed French Gold** Matte Black Venetian Bronze



TRADITIONAL

Antique Brass Brass Matte Black Nickel Oil Rubbed Bronze**

PERFORMANCE

Thick aluminum frame (1 ½") with reinforced corners helps the door stay square over time for long-lasting smooth operation.

Premium double-layer weatherstrip provides added energy efficiency.

SmoothControl Plus™ close system performed better in wind durability testing.

INSTALLATION





See page 16 for details.



Antique Brass







Brushed French Gold

Brass

Matte

Black





Nickel









Bronze







Venetian Bronze

COLOR OPTIONS



GLASS OPTIONS

- Clear Glass
- · Low-E Clear Glass
- · Insulating Glass
- Low-E Insulating Glass
- Laminated





10 SERIES FULLVIEW INTERCHANGEABLE: 10FV


^{*}Hardware sold separately.
**Oil Rubbed Bronze is a "living" finish that will change with time and use. Printing limitations prevent exact color duplication. See your Andersen supplier for actual finish sample.

8 SERIES FULLVIEW INTERCHANGEABLE

VENTILATION

Snap out/in retainer system makes it simple to convert your door from weather protection to full ventilation with interchangeable glass and insect screen panels.





HARDWARE OPTIONS*

Bold name denotes finish shown.





TRADITIONAL Antique Brass Brass Matte Black Nickel Oil Rubbed Bronze**

SECURITY

Built-in keyed deadbolt secures the door to the frame.

PERFORMANCE

Thick aluminum frame (1 ½") with reinforced corners helps the door stay square over time for long-lasting smooth operation.

Premium double-layer weatherstrip provides added energy efficiency.

OPERATION

Dual-closers for added durability.

Push-button closer makes it easy to keep the door open while keeping your hands free.

INSTALLATION





See page 16 for details.



Antique

Matte

Black

Brass

Nickel





Brushed

Bronze*





French Gold













Venetian Bronze

COLOR OPTIONS



GLASS OPTIONS

- · Clear Glass
- Low-E Clear Glass
- · Curved Etching Glass
- · Curved Nickel Glass
- Diamond Lights Glass
- Etched Glass
- Regency Glass






6 SERIES FULLVIEW INTERCHANGEABLE

VENTILATION

Snap out/in retainer system makes it simple to convert your door from weather protection to full ventilation with interchangeable glass and insect screen panels.





HARDWARE OPTIONS*

Bold name denotes finish shown.



COLOR OPTIONS



GLASS OPTIONS

- Clear Glass
- · Low-E Clear Glass
- · Etched Glass

SECURITY

Built-in keyed deadbolt secures the door to the frame.

PERFORMANCE

Aluminum frame (1 $\frac{1}{4}$ ") with reinforced corners helps the door stay square over time.

Single-layer weatherstrip for better energy efficiency.

OPERATION

Single push-button closer makes it easy to keep the door open while keeping your hands free.

INSTALLATION




See page 16 for details.



6 SERIES FULLVIEW INTERCHANGEABLE: 6FV



10 SERIES FULLVIEW RETRACTABLE INSECT SCREEN

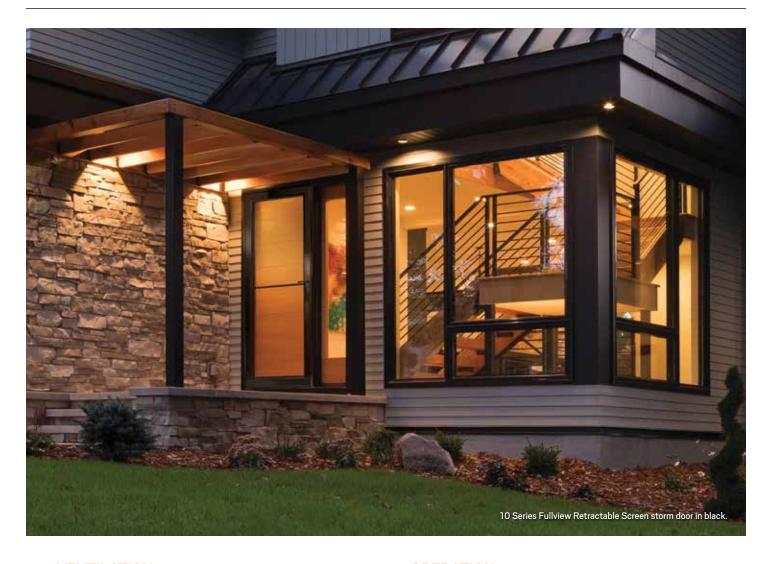

VENTILATION

Easy one-handed retractable insect screen conveniently rolls into the frame when not in use. Vents from the top, offering unlimited glass positioning with the balanced retractable screen.





OPERATION

For advanced operation, this door includes our new SmoothControl Plus™ Close System. The built-in dual closer system allows for more consistent latching and a smoother close motion. It also has an easy-to-use hold-open feature and simple close speed adjustment.





- 50% stronger than standard dual closers*
- Commercial-grade steel closer arm
- More consistent latch
- Easy to use hold-open feature
- Simple close speed adjustment

SECURITY

Built-in keyed deadbolt secures the door to the frame.

HARDWARE OPTIONS*

Bold name denotes finish shown.



MODERN

Brushed Dark Nickel Brushed French Gold Matte Black Venetian Bronze



TRADITIONAL Antique Brass

Brass Matte Black Nickel Oil Rubbed Bronze**

PERFORMANCE

Thick aluminum frame (1 ½") with reinforced corners helps the door stay square over time for long-lasting smooth operation.

Premium double-layer weatherstrip provides added energy efficiency.

SmoothControl Plus[™] close system performed better in wind durability testing.

INSTALLATION





See page 16 for details.



Antique









Brushed French Gold



Brass

Matte



Nickel







Oil Rubbed

Venetian

COLOR OPTIONS





Almond

Black









Terratone



Bronze





Forest

Sandtone







Cinnamon

GLASS OPTIONS

- Clear Glass
- · Low-E Clear Glass





10 SERIES FULLVIEW RETRACTABLE INSECT SCREEN 10RS

^{*}Hardware sold separately.

**Oil Rubbed Bronze is a "living" finish that will change with time and use.

Printing limitations prevent exact color duplication. See your Andersen supplier for actual finish sample.

8 SERIES FULLVIEW RETRACTABLE INSECT SCREEN

VENTILATION

Easy one-handed retractable insect screen conveniently rolls into the frame when not in use. Vents from the top, offering unlimited glass positioning with the balanced retractable screen.





HARDWARE OPTIONS*

Bold name denotes finish shown.



MODERN Brushed Dark Nickel

Brushed French Gold Matte Black Venetian Bronze



TRADITIONAL

Antique Brass **Brass** Matte Black Nickel Oil Rubbed Bronze*

SECURITY

Built-in keyed deadbolt secures the door to the frame.

PERFORMANCE

Thick aluminum frame (1 ½") with reinforced corners helps the door stay square over time for long-lasting smooth operation.

Premium double-layer weatherstrip provides added energy efficiency.

OPERATION



NEW! Dual-closers for added durability.

Push-button closer makes it easy to keep the door open while keeping your hands free.

INSTALLATION





See page 16 for details.





Brass

Nickel







Brushed







Antique

Brass

Matte

Black





Brushed





Oil Rubbed Bronze

Venetian Bronze

COLOR OPTIONS



GLASS OPTIONS

- · Clear Glass
- · Low-E Clear Glass





8 SERIES FULLVIEW RETRACTABLE INSECT SCREEN 8RS

6 SERIES FULLVIEW RETRACTABLE INSECT SCREEN

VENTILATION

Easy one-handed retractable insect screen conveniently rolls into the frame when not in use. Vents from the top, offering unlimited glass positioning with the balanced retractable screen.





HARDWARE OPTIONS*

Bold name denotes finish shown.



COLOR OPTIONS

Nickel

Brass



GLASS OPTIONS

- Clear Glass
- Low-E Clear Glass

SECURITY

Built-in keyed deadbolt secures the door to the frame.

PERFORMANCE

Aluminum frame (1 1/4") with reinforced corners helps the door stay square over time.

Single-layer weatherstrip for better energy efficiency.

OPERATION

Single push-button closer makes it easy to keep the door open while keeping your hands free.

INSTALLATION



See page 16 for details.





6 SERIES FULLVIEW RETRACTABLE INSECT SCREEN **6RS**

10 SERIES 3/4 & 1/2 LIGHT PANEL VENTILATING



MORTISED LEVER HARDWARE OPTIONS*



MORTISED LEVER

Brass Nickel

Bold name denotes finish shown.







VENTILATION

Easy one-handed retractable insect screen that conveniently rolls into the frame when not in use. Vent from the top, offering unlimited glass and ventilation positioning.





SECURITY

Built-in keyed deadbolt secures the door to the frame.

PERFORMANCE

1" thick moisture-resistant wood core with easy-to-clean, lowmaintenance aluminum exterior for added strength and durability.

Handle-side edge seal for additional weather protection with single-layer weatherstrip for energy efficiency.

OPERATION


Single-closer easily props the door open.

INSTALLATION



See page 16 for details.

COLOR OPTIONS









Sandtone

Forest

PANEL STYLES

- ¾ Light
- ½ Light

1/2 LIGHT PET DOOR OPTION:



Available with an integrated 10½" x 15" pet door in white with non-embossed panel

MODEL CODE: 10PRSP







10 SERIES 1/2 LIGHT: 10PRSH

GLASS OPTIONS

- · Clear Glass
- · Clear Glass with Colonial grilles

8 SERIES 3/4 & 1/2 LIGHT PANEL VENTILATING

VENTILATION

Dual finger-latch retractable screen that conveniently rolls into the frame when not in use.





SURFACE MOUNT LEVER HARDWARE OPTIONS*

Bold name denotes finish shown.







SECURITY

Easy-to-use interior deadbolt.

PERFORMANCE

1" thick moisture-resistant wood core with easy-to-clean, low-maintenance aluminum exterior for added strength and durability.

Single-layer weatherstrip for better energy efficiency.

OPERATION

Single-closer easily props the door open.

INSTALLATION



See page 16 for details.

COLOR OPTIONS



GLASS OPTION

• Clear Glass

PANEL STYLES

- ¾ Light
- ½ Light








8 SERIES 1/2 LIGHT: **8PRSH**

6 SERIES 3/4 & 1/2 LIGHT PANEL VENTILATING

VENTILATION

Bottom glass panel that rises behind a stationary insect screen to vent in five positions.



SURFACE MOUNT PUSH-BUTTON HARDWARE OPTIONS*



COLOR OPTIONS



GLASS OPTION

· Clear Glass

PANEL STYLES

- ¾ Light
- ½ Light

SECURITY

Easy-to-use night latch.

PERFORMANCE

1" thick moisture-resistant wood core with easy to clean, low-maintenance aluminum exterior for added strength and durability.

Single-layer weatherstrip for better energy efficiency.

OPERATION

Single-closer easily props the door open.

INSTALLATION



See page 16 for details.





6 SERIES 3/4 LIGHT: **6PFS**

6 SERIES 1/2 LIGHT: 6PFSH

Select ½ light models only.

RETRACTABLE SCREEN DOOR



LUMINAIRE® RETRACTABLE SCREEN DOOR

Fresh Air at Your Fingertips

Add ventilation to your home without changing the look of your entryway. Introducing the LuminAire® retractable screen door from Andersen featuring the SlideAway® insect screen system that disappears when not in use. With a slim-profile, color-matched handle and sleek profilfe design, the LuminAire door integrates seemlessly with an entry way.

VENTILATION

Brings natural light and ventilation to your home on demand, designed to disappear when not in use with our SlideAway insect screen system. It has a quiet, controlled operation for smooth, reliable performance.

SECURITY

Includes an easy-to-use night latch.

PERFORMANCE

Features reinforced corners for long-lasting durability.

COLOR OPTIONS







White Sandtone

INSTALLATION

Installs in 3 simple steps with only basic tools and no cutting is required.*

CONFIGURATIONS



Fits single hinged doors

FITS OPENING TYPE: Single-Hinged Door

ADJUSTABLE TO WIDTHS: 32" – 36"

Fits opening widths 31 7/8" - 36 3/8"

HEIGHT:

Fits opening heights 80" – 80 ⁷/8" *Available in 78" and 84" heights*

Printing limitations prevent exact color duplication. See your Andersen supplier for actual color samples.



Fits double inswing hinged doors

FITS OPENING TYPE: Double-Hinged Door

ADJUSTABLE TO WIDTHS: 68" – 72"

Fits opening widths 68" - 72"

HEIGHT:

Fits opening heights 80" – 80 ⁷/8" *Available in 78" and 84" heights*

^{*}Refer to installation guide for complete instructions.

INSTALLATION SYSTEMS

We're taking the hassle out of installing a storm door, so there's no second-guessing. Just a job well done the first time.



Our **Rapid Install 1** door system is the easiest installation option available in the market today. It was designed with the DIY audience in mind. We prehang the door so there is no cutting, minimal drilling and virtually no measuring required. We cut the Z-bars to length, assemble them on the door and drill the handle holes so you don't have to. Simply take the door out of the package and set it in the opening. The entire install takes less than an hour.



Our **Rapid Install 2** door system offers a universally handed option. It was designed with the DIY audience in mind. We provide an unassembled door with Z-bars cut to length to save time on the installation. The process takes less than two hours, and no cutting is required.*



Our **Pro Install** door system was designed with the professional installer in mind. We provide an unassembled door with a Z-bar of 81" that can be cut to length. An adjustable U-channel sweep makes necessary adjustments easy once the door is installed. The handle holes are predrilled to save time on the job and our twist-to-lock hardware installation makes for a quality, easy install.



Installation by Door Type

	FULLVIEW INTERCHANGEABLE & FULLVIEW RETRACTABLE INSECT SCREEN			¾ LIGHT & ½ LIGHT PANEL VENTILATING		
INSTALL TYPE	10 SERIES	8 SERIES	6 SERIES	10 SERIES	8 SERIES	6 SERIES
PRO INSTALL®	•	•				
RAPID 1	•	•				
RAPID 2			•	•	•	•

MEASURING GUIDE

1

Check to ensure door opening and trim allow enough space for a storm door.

DIMENSION A: Minimum ¾" width flat trim surface required

DIMENSION B: Minimum 1" trim (brickmould) depth required

DIMENSION C: Minimum of $2\frac{1}{2}$ " door frame (jamb) depth required*

ENTRANCE DOOR (closed position) Door frame (jamb) Exterior door trim (brickmould) Storm Door Opening Width Measure from inside face of brickmould

INTERIOR

EXTERIOR



Measure door opening in order to determine the size storm door you need.

RECORD YOUR SHORTEST WIDTH MEASUREMENT:

W:

RECORD YOUR
HEIGHT MEASUREMENT:


H:

Measure the width of the door opening at the inside face of exterior trim on each side at top, center and bottom and record the shortest measurement.

(See measure points W1, W2 & W3 in the illustration at right)

Measure for the height from the sill to the underside of the brickmould at the top.

(See measure point H in the illustration at right)



Determine the size you need based on the door opening measurements and the storm door model that is selected.

STANDARD DOOR SIZE WIDTH RANGES:	30"	32"	34"	36"	STANDARD DOOR SIZE HEIGHT RANGES:	80"
10FV, 10RS, 8FV and 8RS	29 ⁷ /8" to 30 ³ /8"	31 ⁷ /8" to 32 ³ /8"	33 ⁷ /8" to 34 ³ /8"	35 ⁷ /8" to 36 ³ /8"		80" to 80 ⁷ /8"
6FV, 6RS and all Panel Ventilating	29 ⁷ /8" to 30 ³ /8"	31¾" to 32 ³ /8"	33¾" to 34³/8"	35¾" to 36 ⁷ /8"		80" to 81"

3a. Custom Size Availability

FULLVIEW							
SERIES	STYLE	CUSTOM	CUSTOM XL				
10 SERIES	Interchangeable	•	•				
10 SERIES	Retractable Screen	•					
8 SERIES	Interchangeable	•	•				
O SERIES	Retractable Screen	•					
6 SERIES	Interchangeable						
O SERIES	Retractable Screen	•					
WIDTH HEIG							
Custom Door O	pening	27 ⁷ /8" to 38 ³ /8"	72" to 84 ⁷ /8"				
Custom XL Doo	r Opening	27 ⁷ /8" to 42"	72" to 96"				

Select	models available in	custom sizes	or custom XL sizes
- 001001	. Illoadis avallable li	i custom sizes i	or castorn AL Sizes

PANEL VENTILATING							
SERIES	STYLE	CUSTOM	CUSTOM XL				
10 SERIES	¾ Light	•					
10 SERIES	½ Light	•					
8 SERIES	¾ Light	•					
6 SERIES	½ Light	•					
6 SERIES	¾ Light						
0 SERIES	½ Light	•	•				
		WIDTH	HEIGHT				
Custom Door O	pening	27 ³ / ₄ " to 38 ³ / ₈ "	75" to 84 ⁷ /8"				
Custom XL Doo	r Opening	38 ¹ / ₂ " to 42"	79" to 91"				



Choose the door handing that works best for your entryway.





^{*}Depending on the depth and location of your entry door handle set, additional clearance may be needed.

FULLVIEW COMPARISON CHART

	FULLVIEW INTERCHANGEABLE			FULLVIEW RETRACTABLE		
	10 SERIES	8 SERIES	6 SERIES	10 SERIES	8 SERIES	6 SERIES
GLASS	_	'			'	'
Clear	•	•	•	•	•	•
Low-E Clear	•	•	•	•	•	•
Insulating	•					
Low-E Insulating	•					
Laminated Safety Glass	•					
Decorative		•	•			
COLORS					1	1
8 Colors	•	•		•	•	
6 Colors						•
HANDLE STYLES						
Modern	•	•		•	•	
Traditional	•	•		•	•	
Classic			•			•
CLOSERS						
SmoothControl Plus™	•			•		
Dual Closers		•			•	
Single Closer			•			•
WEATHERSTRIP						
Double	•	•		•	•	
Single			•			•
PANEL THICKNESS						
1 1/2"	•	•		•	•	
1 1/4"			•			•
LOCKS						
Keyable Deadbolt	•	•		•	•	•
INSTALLATION						
Pro Install	•	•		•	•	
Rapid Install 1	•	•		•	•	
Rapid Install 2			•			•
MEASUREMENTS						
Width	30"*, 32", 34", 36"	30", 32", 34"**, 36"**	30", 32", 34", 36"	30"*, 32", 34", 36"	30", 32", 34", 36"	30", 32", 34", 36"
Height	80"	80", 84" ^{††}	78"* [‡] , 80"	80"	80"	78"* [‡] , 80"
Custom	†	i i		†	†	•
Custom XL	• †	• †				

FULLVIEW STORM DOORS LIMITED WARRANTY



Lifetime limited warranty that covers paint adhesion, hinges and frame with a 5-year limited warranty on most other components. Visit andersenwindows.com/warranty for details.

3/4 & 1/2 LIGHT COMPARISON CHART

	¾ LIGHT VENTILATING			½ LIGHT VENTILATING		
	10 SERIES	8 SERIES	6 SERIES	10 SERIES	8 SERIES	6 SERIES
GLASS	•	•				
Clear Glass	•	•	•	•	•	
Clear Glass with Colonial Grilles	•			•		
COLORS						
6 Colors	•			•		
4 Colors		•			•	
2 Colors			•			•
HANDLE STYLES						
Mortised Lever	•			•		
Surface Mount Lever		•			•	
Surface Mount Push Button			•			•
CLOSER						
Single Closer	•	•	•	•		•
WEATHERSTRIP						
Single	•	•	•	•		•
PANEL THICKNESS						
1"	•	•	•	•	•	•
LOCKS						
Keyable Deadbolt	•			•		
Interior Deadbolt		•			•	
INSTALLATION						
Rapid Install 2	•	•	•	•		
MEASUREMENTS						
Width	32", 34", 36"	30", 32", 34", 36"	30", 32", 34", 36"	32", 34", 36"	30", 32", 34", 36"	30", 32", 34", 36"
Height	80"	78"*, 80"	78"*, 80"	80"	78"*, 80"	80"
Custom	•	•				
Custom XL						•

3/4 & 1/2 LIGHT STORM DOORS LIMITED WARRANTY



10 yr 10-year limited warranty that covers paint adhesion, hinges and frame with a 1-year limited warranty on most other components. Visit andersenwindows.com/warranty for details.



FIND HELPFUL VIDEOS AND RESOURCES AT

andersenwindows.com/stormdoors

- View how to measure for your storm door
- Watch how to install a storm door
- Try our "Design your storm door" tool
- Installation instructions
- Replacement parts ordering information

Or us call at 1-800-933-3626



