ROOFING SELECTION GUIDE

Luxury, Designer & Traditional Roofing Shingles







You know it when you see it.

It's not just a roof. It's a CertainTeed roof.

Quality. Durability. Style. Color.


When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess, when you can be Certain?



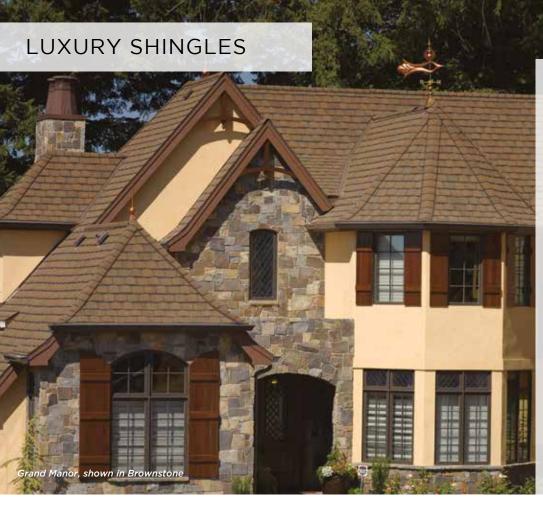



GRAND MANOR®

- Two full-size, fiberglass-based shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:












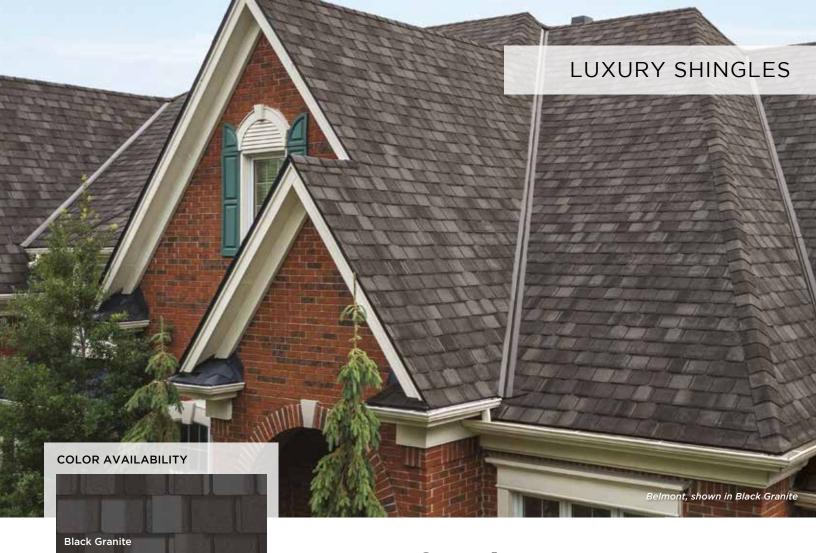












BELMONT®

- Authentic depth and dimension of natural slate
- 275 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- All colors are available in an 🗞 Impact Resistant version



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

• All colors available in a version that meets UL2218 Class 4



CARRIAGE HOUSE®

- · Two full-size, fiberglass-based shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 350 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537












GRAND MANOR and CARRIAGE HOUSE SHINGLES


These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.













PRESIDENTIAL SHAKE® TL

- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 475 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F


Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance:Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

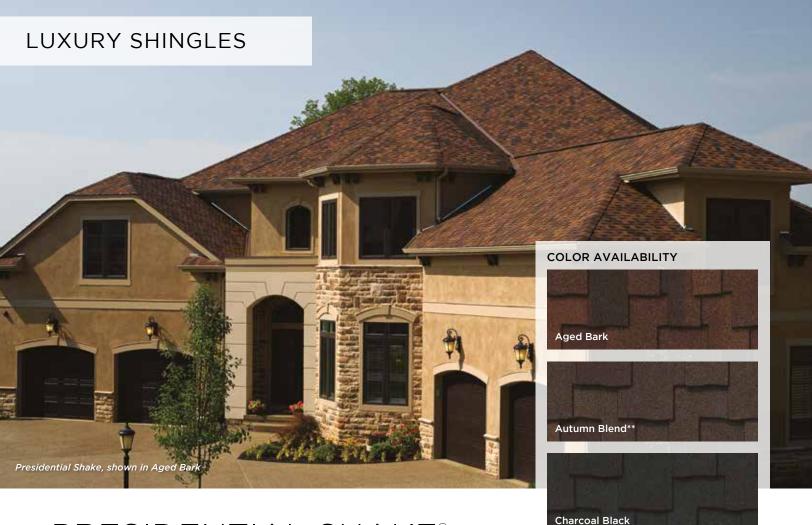

PRESIDENTIAL SHAKE®

- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.
- ** Color available in impact resistant version.
- *** ENERGY STAR qualified product called Presidential Solaris® Gold meets both solar reflectance and thermal emissivity requirements.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

 Select colors (**) available in version that meets UL2218 Class 4

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:
























LANDMARK® PREMIUM

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 300 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance:Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



LANDMARK® PRO

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance:Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:












































LANDMARK®

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 228 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance:Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



LANDMARK SOLARIS®

Solar Reflective Shingles


- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Meets ENERGY STAR requirements
- Lifetime limited transferable warranty residential*
- 50-year limited transferable warranty group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data

Product		CRRC Rated Product Directory Reflective					16 24*	rgy r tified	
riouuci	Color	Solar Reflectance		Thermal Emittance		Index Initial Aged		CA 2016 Title 24*	Energy Star Certifie
		Initial	Aged		Aged	IIIILIdi	Ayeu	01	шио
Landmark Solaris" Gold	Max Def Resawn Shake	0.26	0.25	0.88	0.90	26	25	YES	YES
Landmark Solaris" Gold	Max Def Weathered Wood	0.25	0.24	0.90	0.89	25	24	YES	YES
Landmark Solaris" Platinum	Coastal Tan	0.40	0.36	0.91	0.90	45	40	YES	YES
Landmark Solaris" Platinum	Santa Fe	0.40	0.35	0.90	0.91	45	39	YES	YES
Landmark Solaris" Platinum	Sierra Buff	0.41	0.37	0.92	0.90	47	41	YES	YES

^{*} Can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements.





LANDMARK SOLARIS PLATINUM







^{*} See warranty for specific details and limitations.













HIGHLAND SLATE®

- Single layer fiberglass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (Select colors**)



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Certified to meet ASTM D3018, Type 1
- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Impact Resistance:

 Select colors (**) available in version that meets UL2218 Class 4

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



Max Def Burnt Sienna Max Def Driftwood Max Def Georgetown Gray Max Def Granite Gray

COLOR AVAILABILITY

NORTHGATE®

- Two-piece laminated fiberglass-based construction
- Greater cold-weather flexibility, increased ductile properties, increased granule adhesion and enhanced crack resistance
- Classic shades and dimensional appearance of natural wood or slate
- 270 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

• UL2218 Class 4

UL 2218 Class 4

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



Max Def Heather Blend

Max Def Hunter Green









TRADITIONAL SHINGLES



In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CERTAINTEED XT[™]25

- Fiberglass composition
- Designed for long-lasting performance and durability
- 203 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 5-year SureStart[™] protection
- 5-year 60 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537


Autumn Brown Mint Frost Sandalwood
Black Nickel Gray Star White
Gray Frost Oakwood Timber Blend
Maple Red Blend Pewter Weathered Wood

HIP AND RIDGE ACCESSORIES



Shangle® Ridge Accessory

- Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate, Carriage House and Belmont colors
- · Algae resistant



Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingleover vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Landmark Series, Landmark TL, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont colors



Mountain Ridge®

- Fiberglass reinforced SBS modified bitumen
- Five layer design with tri-laminate base
- Available in 8" and 10" widths
- 8" exposure
- Algae resistant



12" NorthGate® Accessory


 Hip and ridge for NorthGate shingles



Technology that protects the beauty of your roof and strengthens its performance.

NAILTrak®

Shingle Technology

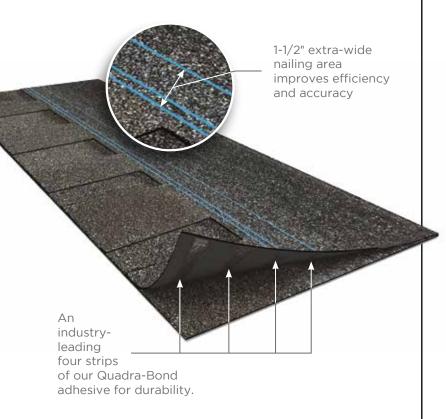

THE BOND THAT HOLDS IT TOGETHER.

For more than a decade, NailTrak has improved shingle installation by providing a nailing area three times wider than that of a typical laminate shingle. This increases efficiency and accuracy in installation, providing homeowners greater peace of mind. Landmark® shingles also feature our specially-formulated Quadra-Bond® adhesive, providing industry-leading resistance to delamination. Together, our NailTrak and Quadra-Bond technologies deliver the strength and durability that allow your roof to stand the test of time.




Algae-Resistant Shingle Technology

THE ULTIMATE IN STAIN PROTECTION.

Those streaks you see on other roofs in your neighborhood? That's algae, and it's a common eyesore on roofing throughout North America. CertainTeed's StreakFighter technology uses the power of science to repel algae before it can take hold and spread. StreakFighter's granular blend includes naturally algae-resistant copper, helping your roof maintain its curb appeal and look beautiful for years to come.


Granule with StreakFighter Technology

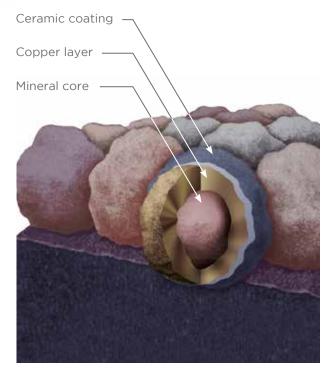

Underlayment Protection

WINTERGUARD®







WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.

For specific details and limitations, refer to the actual product warranties.

ROOFERS' SELECT®

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt. It lays flat and is extremely resistant to wrinkling, reduces the likelihood of slipping for increased safety, doesn't tear away from fasteners when walked on or in strong wind and meets underlayment requirements for the CertainTeed Integrity Roof System™.

DIAMONDDECK®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.

ROOFRUNNER®

Lightweight synthetic polymer-based underlayment outperforms felt and outclasses other synthetics. Designed for use on roof decks as a water- resistant layer beneath asphalt roofing shingles, this scrim-reinforced underlayment includes a special top surface treatment that provides excellent slip resistance, even when wet. Large roll size - 4ft wide x 250 ft long - speeds application.

METALAYMENT®

MetaLayment self-adhering underlayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.



SureStart[™] Protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles.

See actual warranty for details and limitations.

Lifetime Limited Warranty Shingles	3-STAR Protection	4-STAR Protection	5-STAR Protection
Coverage	20 years	50 years*	50 years**
Materials & Labor	~	v	✓
Tear-off	·	~	~
Disposal		~	~
Workmanship			✓***

NOTE: XT™30 IR and Patriot shingles carry 10 years with 3-STAR, 20 years with 4-STAR and 25 years with 5-STAR coverage, including the features as indicated above.

Fully transferable for 10 years with 3-STAR Coverage, 12 years with 4-STAR Coverage, and 15 years with 5-STAR Coverage.

- *Applies to single-family detached houses. Duration for all other types of structures is limited to 25 years.
- **Applies to single-family detached houses. Duration for all other types of structures is limited to 30 years.
- ***Workmanship is covered for 25 years.

Flat Roof Sections: If a CertainTeed Flintlastic self-adhered roof system is part of the job, up to 10 squares will be covered for 12, 15 or 20 years depending upon the specific system installed. Refer to the Commercial Systems Specifications Manual for all other Flintlastic systems.



SELECTION GUIDE

LUXURY SHIP	NGLES	Shingle Construction and Description	Weight (lbs. per square)	UL Class A Fire Resistance Rating	UL Certified to Meet ASTM D3462	UL Certified to Meet ASTM D3018 Type 1	UL 2218 Impact Resistance Rating	ASTM D3161 Wind Resistance
Grand Manor		Two full-size, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied	425	>	٧	V		Class F, 110 mph
Belmont Impact Resistant Version Available		Single layer, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate	275	>	>	V	Class 4	Class F, 110 mph
Carriage House	لللك	Two full-size, fiberglass-based shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied		~	~	V		Class F, 110 mph
Presidential Shake TL		Three-piece laminated fiberglass construction; Distinctive sculpted, rustic look	475	~	~	~		Class F, 110 mph
Presidential Shake Impact Resistant Version Available (Select colors)	hmi	Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look	355	>	٧	V	Class 4	Class F, 110 mph
Presidential Solaris Gold	dential Two-piece laminated fiberglass-based		355	>	>	~		Class F, 110 mph
DESIGNER SI	HINGLES							
Landmark Premium		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	300	٧	>	٧		Class F, 110 mph
Landmark Pro		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	250 V V			Class F, 110 mph		
Landmark		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate		>	٧	٧		Class F, 110 mph
Landmark Solaris		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate		>	>	٧		Class F, 110 mph
Highland Slate Impact Resistant Version Available (Select colors)		Single layer fiberglass-based construction; Blended shades and dimensional appearance of natural slate	240	>	>	٧	Class 4	Class F, 110 mph
NorthGate		Two-piece laminated fiberglass-based construction; Greater cold-weather flexibility, increased ductile properties.		>	>	~	Class 4	Class F, 110 mph
TRADITIONAL SHINGLES								
XT 25		Fiberglass composition; Designed for long-lasting performance and durability	203	~	~	V		Class F, 110 mph

^{**} Wind warranty upgrade to 130 mph available.

Miami-Dade Product Control Acceptance	Conforms To CSA Standard A123.5	Limited Transferable Warranty Against Manufacturing Defects On Residential Applications '50-Year on Group-owned or Commercial Applications	StreakFighter algae-resistance Warranty (where available)	SureStart Protection	Wind-Resistance Warranty Upgraded wind warranty available. See warranty for details and limitations	Shingle Size	Bundles Per Square
٧	\ \	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
٧	~	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	4
>	<	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
~	~	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	6
>	~	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
>	~	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
٧	~	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
٧	>	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
٧	~	Lifetime	10-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
>	>	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
~	~	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	3
~	~	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
~		25-year	10-year	5-year	5-year 60 mph	12" x 36" 5" Exposure	3

CertainTeed starter and CertainTeed hip and ridge required.

*** With approved underlayment

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor, Belmont and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for and Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- · Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- · Assures Class A fire rating
- · Saves significant installation time

CertainTeed Swiftstart®

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Each 18-piece bundle covers 116 lineal ft.
- Recommended for use to obtain enhanced warranties

Shangle® Ridge Accessory

 Hip and ridge for Grand Manor, Carriage House, Highland Slate and Belmont; 10 lineal ft. per bundle; 15 shingles per bundle

Shadow Ridge®

 Hip and ridge for Landmark Series; 30 lineal ft. per bundle; 24 shingles per bundle

Mountain Ridge®

 Hip and ridge for Presidential TL, Presidential Shake, Presidential Solaris, Landmark TL, Landmark Series and Landmark Solaris.

Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal ft. per bundle; 24 shingles per bundle

Cedar Crest®

 Hip and ridge for Landmark Series, Landmark TL, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont; 20 lineal ft. per bundle


12" NorthGate® Accessory

• Hip and ridge for NorthGate shingles

Ventilation

- CertainTeed Ridge Vent 9" filtered
- CertainTeed Ridge Vent 12" filtered/unfiltered
- CertainTeed Rolled Ridge Vent filtered/unfiltered
- CertainTeed Intake Vent filtered
- CertainTeed Static Vent



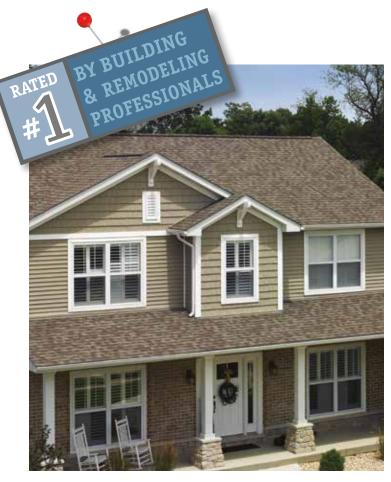


What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

MATTERHORN®

Metal Roofing

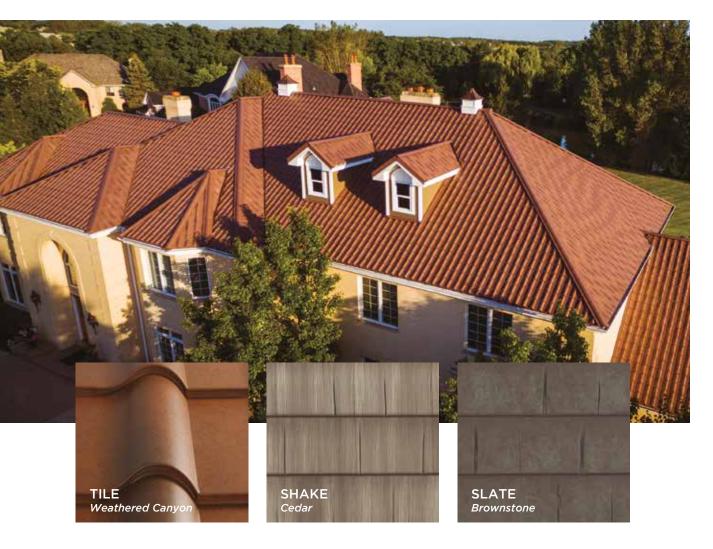

Because it's more than just a roof

Matterhorn Metal Roofing takes the form of slate, tile or wood shake to create a beautiful roof that makes a lasting impression.

Replicate the charm of artisanal roofing at a fraction of the cost with durable, lightweight steel.

Includes a lifetime limited warranty. Laboratory tested to resist fire, wind and hail.

Features a proprietary multi-coat paint system that offers 17 hyper-realistic color options across all profiles, including 16 CRRC-rated cool roofing colors.





Integrity Roof System™

A COMPLETE APPROACH TO LONG LASTING BEAUTY AND PERFORMANCE

With as much care as you take in selecting the right contractor, choosing the right roof system is equally as important. A CertainTeed Integrity Roof System combines key elements that help ensure you have a well-built roof for long-lasting performance.

1. Waterproofing Underlayment

The first step in your defense against the elements. Self-adhering underlayment is installed at vulnerable areas of your roof to help prevent leaks from wind-driven rain and ice dams.

2. Water-Resistant Underlayment

Provides a protective layer over the roof deck and acts as a secondary barrier against leaks.

3. Starter Shingles

Starter Shingles are the first course of shingles that are installed and designed to work in tandem with the roof shingles above for optimal shingle sealing and performance.

4. Shingles

Choose from a variety of Good-Better-Best styles to complement any roof design and fit your budget.

5. Hip & Ridge Caps

Available in numerous profiles, these accessories are used on the roof's hip and ridge lines for a distinctive finishing touch to your new roof.

6. Ventilation

A roof that breathes is shown to perform better and last longer. Ridge Vents, in combination with Intake Vents, allow air to flow on the underside of your roof deck, keeping the attic cooler in the summer and drier in the winter.



learn more at:

certainteed.com/roofing



Integrity Roof System

CertainTeed Corporation

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • GYPSUM • CEILINGS • INSULATION