

T R E A T E D  
E N G I N E E R E D  
W O O D C L A D D I N G



E N G I N E E R E D  
F O R C O M M E R C I A L  
A P P L I C A T I O N S





Evansville Marine Service, Evansville, IN  
Morley & Associates, architect  
Spurling Properties, builder

LP® SmartSide® 5/50 Warranty

**5 YEAR**  
100% labor and  
material replacement  
**50 YEAR**  
prorated limited  
warranty on substrate

Complete warranty details  
available at [lpcorp.com](http://lpcorp.com)

## CLADDING THAT MAKES (AND TAKES) AN IMPACT.

When life brings storms and hail showers, LP® SmartSide® products resist impacts and hail damage, backed by a 5-/50-year Limited Warranty.

- Be confident in installing a performance-driven cladding product that stands up to harsh weather
- Homeowners can trust LP SmartSide products to resist impact from airborne debris and everyday bumps
- Deliver beauty, durability and peace of mind with a Limited Warranty that now covers hail damage

Effective for products installed on or after January 1, 2017, the LP SmartSide Limited Warranty covers damage from hail, up to 1.75" in diameter. The 50-year prorated Limited Warranty with 5-year 100% labor and material replacement provides protection with confidence.


\*As part of this coverage, LP warrants that its LP SmartSide products will resist damage from hail when properly installed and maintained according to the LP application instructions in effect at the time of installation. Damage under this Hail Damage Limited Warranty is defined as a crack, chip or dent in the surface overlay exceeding 3/8 inch in length or diameter.

**CEDAR TEXTURE LAP**

- The bold look of cedar
- APA-certified
- May qualify for green building program credits
- Treated engineered wood strand substrate
- 5-/50-year Limited Warranty, including hail damage coverage\*




**38 SERIES CEDAR TEXTURE LAP (STRAND)**



LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	5.84 in. (14.8 cm)	0.315 in. (8 mm)
16 ft. (192 in.)(4.9 m)	7.84 in. (19.9 cm)	0.315 in. (8 mm)
16 ft. (192 in.)(4.9 m)	11.84 in. (30.1 cm)	0.315 in. (8 mm)

**76 SERIES CEDAR TEXTURE LAP (STRAND)**




LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	5.84 in. (14.8 cm)	0.375 in. (10 mm)
16 ft. (192 in.)(4.9 m)	7.84 in. (19.9 cm)	0.375 in. (10 mm)
16 ft. (192 in.)(4.9 m)	11.84 in. (30.1 cm)	0.375 in. (10 mm)

**CEDAR TEXTURE VERTICAL SIDING**

- Ideal as an accent panel on walls, gable ends, and more\*\*
- Board & Batten siding creates an aesthetic
- 16' length piece installation, eliminates horizontal joints
- Provides a seamless appearance on vertical columns
- Use with 16' SmartSide Cedar or Reversible trim for batten
- May qualify for green building program credits
- Treated engineered wood strand substrate



**38 SERIES CEDAR VERTICAL SIDING (STRAND)**




LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	15.94 in. (40.5 cm)	0.315 in. (8 mm)

**SMOOTH FINISH LAP**

- Available in 16' lengths for fewer seams
- Treated engineered wood fiber substrate
- 5-/50-year Limited Warranty, including hail damage coverage\*



**76 SERIES SMOOTH FINISH LAP (FIBER)**

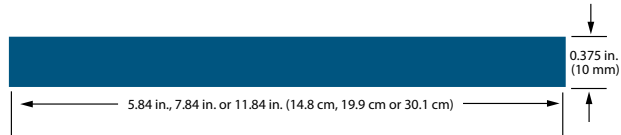

LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	5.84 in. (14.8 cm)	0.375 in. (10 mm)
16 ft. (192 in.)(4.9 m)	7.84 in. (19.9 cm)	0.375 in. (10 mm)
16 ft. (192 in.)(4.9 m)	11.84 in. (30.1 cm)	0.375 in. (10 mm)

\*The full warranty and exclusions can be found at [LPCorp.com](http://LPCorp.com).

\*\*Vertical Siding may only span one plate-to-plate. Each vertical application is not to span beyond one floor to ceiling distance, or one floor to top of gable distance. Refer to the LP Vertical Siding Application Instructions at [LPCorp.com](http://LPCorp.com) for additional limitations.


# CEDAR TEXTURE PANEL

## CEDAR TEXTURE PANEL

- Rated for structural use by the Engineered Wood Association
- Ideal exterior for high winds or seismic activity
- Eliminates need for additional bracing on load-bearing walls
- Available in Groove or No Groove Cedar Texture panels
- Treated engineered wood strand substrate
- 5-/50-year Limited Warranty, including hail damage coverage\*




### 38 SERIES CEDAR TEXTURE PANEL 8" O.C. (STRAND)

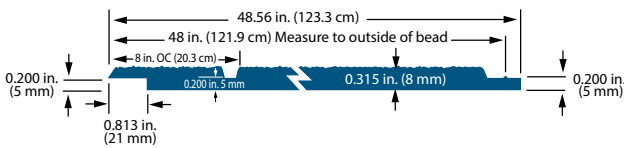


LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	MINIMUM THICKNESS
6 ft. (72 in.)(1.8 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.315 in. (8 mm)
7 ft. (84 in.)(2.1 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.315 in. (8 mm)
8 ft. (96 in.)(2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.315 in. (8 mm)
9 ft. (108 in.)(2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.315 in. (8 mm)
10 ft. (120 in.)(3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.315 in. (8 mm)

### 38 SERIES CEDAR TEXTURE PANEL—NO GROOVE (STRAND)

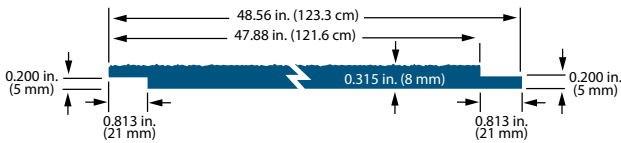


LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	No Groove	N/A	48.56 in. (123.3 cm)	0.315 in. (8 mm)

### 76 SERIES CEDAR TEXTURE PANEL 4" & 8" O.C. (STRAND)

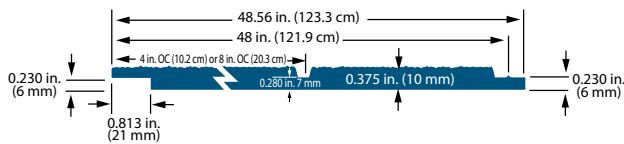

LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	4 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.375 in. (10 mm)
9 ft. (108 in.)(2.7 m)	4 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.375 in. (10 mm)
10 ft. (120 in.)(3.0 m)	4 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.375 in. (10 mm)
8 ft. (96 in.)(2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.375 in. (10 mm)
9 ft. (108 in.)(2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.375 in. (10 mm)
10 ft. (120 in.)(3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.375 in. (10 mm)

### 76 SERIES CEDAR TEXTURE PANEL—NO GROOVE (STRAND)

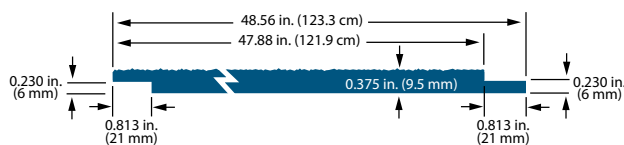


LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	No Groove	N/A	48.56 in. (123.3 cm)	0.375 in. (10 mm)




**Famous Dave's, Timonium, MD**  
 The Roberts Group, architect  
 Holland Construction, builder

**190 SERIES CEDAR TEXTURE PANEL 8" O.C. (STRAND)**

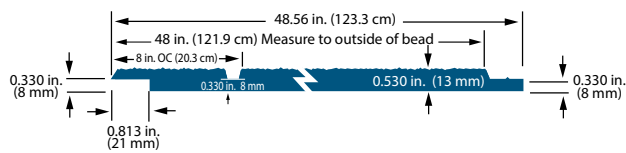

LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.530 in. (13 mm)
9 ft. (108 in.)(2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.530 in. (13 mm)
10 ft. (120 in.)(3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (123.3 cm)	0.530 in. (13 mm)

**190 SERIES CEDAR TEXTURE PANEL—NO GROOVE (STRAND)**

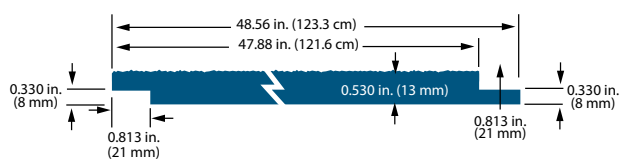

LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	No Groove	N/A	48.56 in. (123.3 cm)	0.530 in. (13 mm)
9 ft. (108 in.)(2.7 m)	No Groove	N/A	48.56 in. (123.3 cm)	0.530 in. (13 mm)
10 ft. (120 in.)(3.0 m)	No Groove	N/A	48.56 in. (123.3 cm)	0.530 in. (13 mm)



# SHAKE & SOFFIT

## CEDAR TEXTURE SHAKES

- Reversible staggered or straight edge offers exceptional design versatility
- Ideal as a decorative accent with any cladding
- For use on all exterior walls
- Shiplap ends provide seamless appearance
- Treated engineered wood fiber substrate
- 5-/50-year Limited Warranty, including hail damage coverage\*



### CEDAR TEXTURE SHAKES (FIBER)

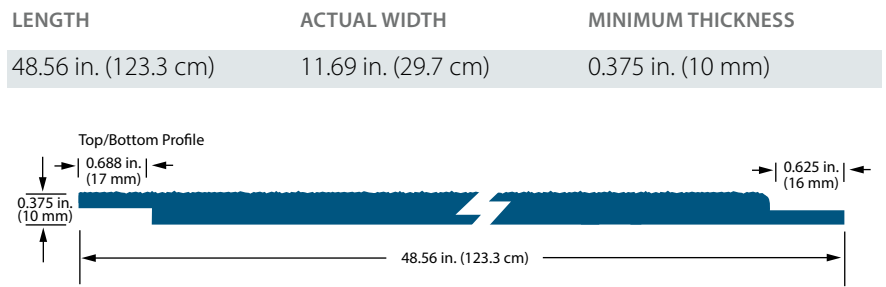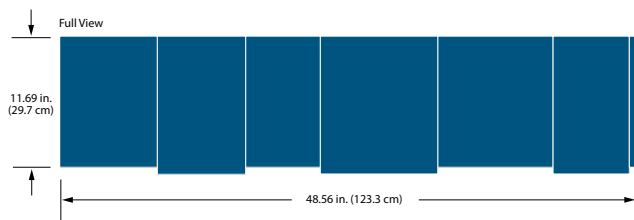



## CEDAR TEXTURE VENTED SOFFIT

- Ideal alternative to MDO, plywood, and hand-installed metal vents
- Precision-cut vents offer 10 square inches of ventilation per linear foot
- Designed to minimize paint build-up
- Promotes continuous airflow
- Cut-to-width options eliminate need to rip full sheets
- Treated engineered wood strand substrate



### 38 SERIES CEDAR TEXTURE VENTED SOFFIT— CUT-TO-WIDTH (STRAND)

LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	11.94 in. (30.3 cm)	0.315 in. (8 mm)
16 ft. (192 in.)(4.9 m)	15.94 in. (40.5 cm)	0.315 in. (8 mm)
16 ft. (192 in.)(4.9 m)	23.94 in. (60.8 cm)	0.315 in. (8 mm)

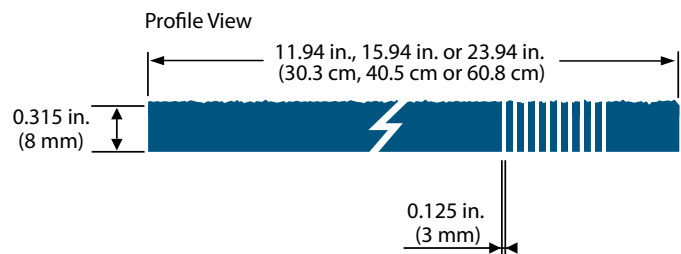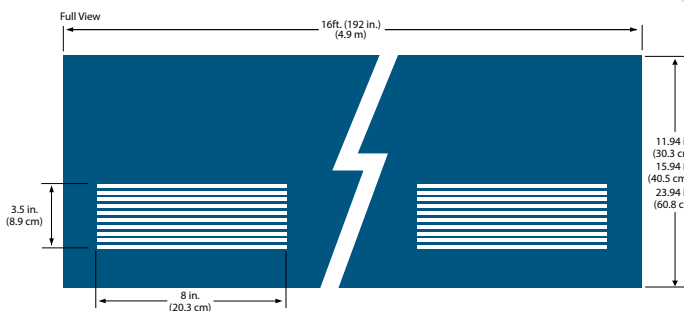


## CEDAR TEXTURE SOFFIT

- Ideal alternative to MDO and plywood soffits
- 38 Series engineered for closed soffit applications
- 76 Series & 190 Series ideal for use as starter course for roofs with exposed eaves
- Cut-to-width options eliminate need to rip full sheets
- Treated engineered wood strand substrate
- 5-/50-year Limited Warranty, including hail damage coverage\*
- May qualify for green building program credits




### 38 SERIES 4'x8' CEDAR TEXTURE SOFFIT (STRAND)

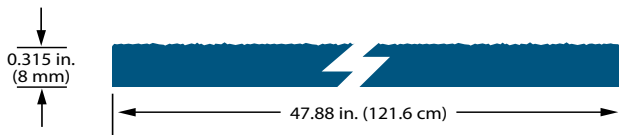


LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	47.88 in. (121.6 cm)	0.315 in. (8 mm)

### 38 SERIES CEDAR TEXTURE SOFFIT— CUT-TO-WIDTH (STRAND)




LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	11.94 in. (30.3 cm)	0.315 in. (8 mm)
16 ft. (192 in.)(4.9 m)	15.94 in. (40.5 cm)	0.315 in. (8 mm)
16 ft. (192 in.)(4.9 m)	23.94 in. (60.8 cm)	0.315 in. (8 mm)

### 76 SERIES 4'x8' CEDAR TEXTURE SOFFIT (STRAND)

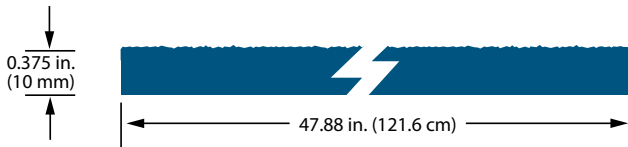


LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	47.88 in. (121.6 cm)	0.375 in. (10 mm)

### 76 SERIES CEDAR TEXTURE SOFFIT— CUT-TO-WIDTH (STRAND)




LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	11.94 in. (30.3 cm)	0.375 in. (10 mm)

### 190 SERIES 4'x8' CEDAR TEXTURE SOFFIT (STRAND)

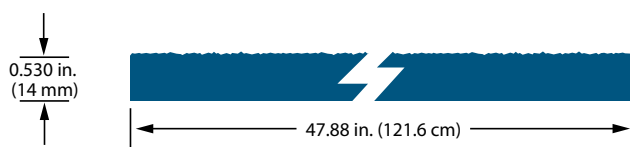

LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
8 ft. (96 in.)(2.4 m)	47.88 in. (121.6 cm)	0.530 in. (14 mm)

\*The full warranty and exclusions can be found at [LPCorp.com](http://LPCorp.com).

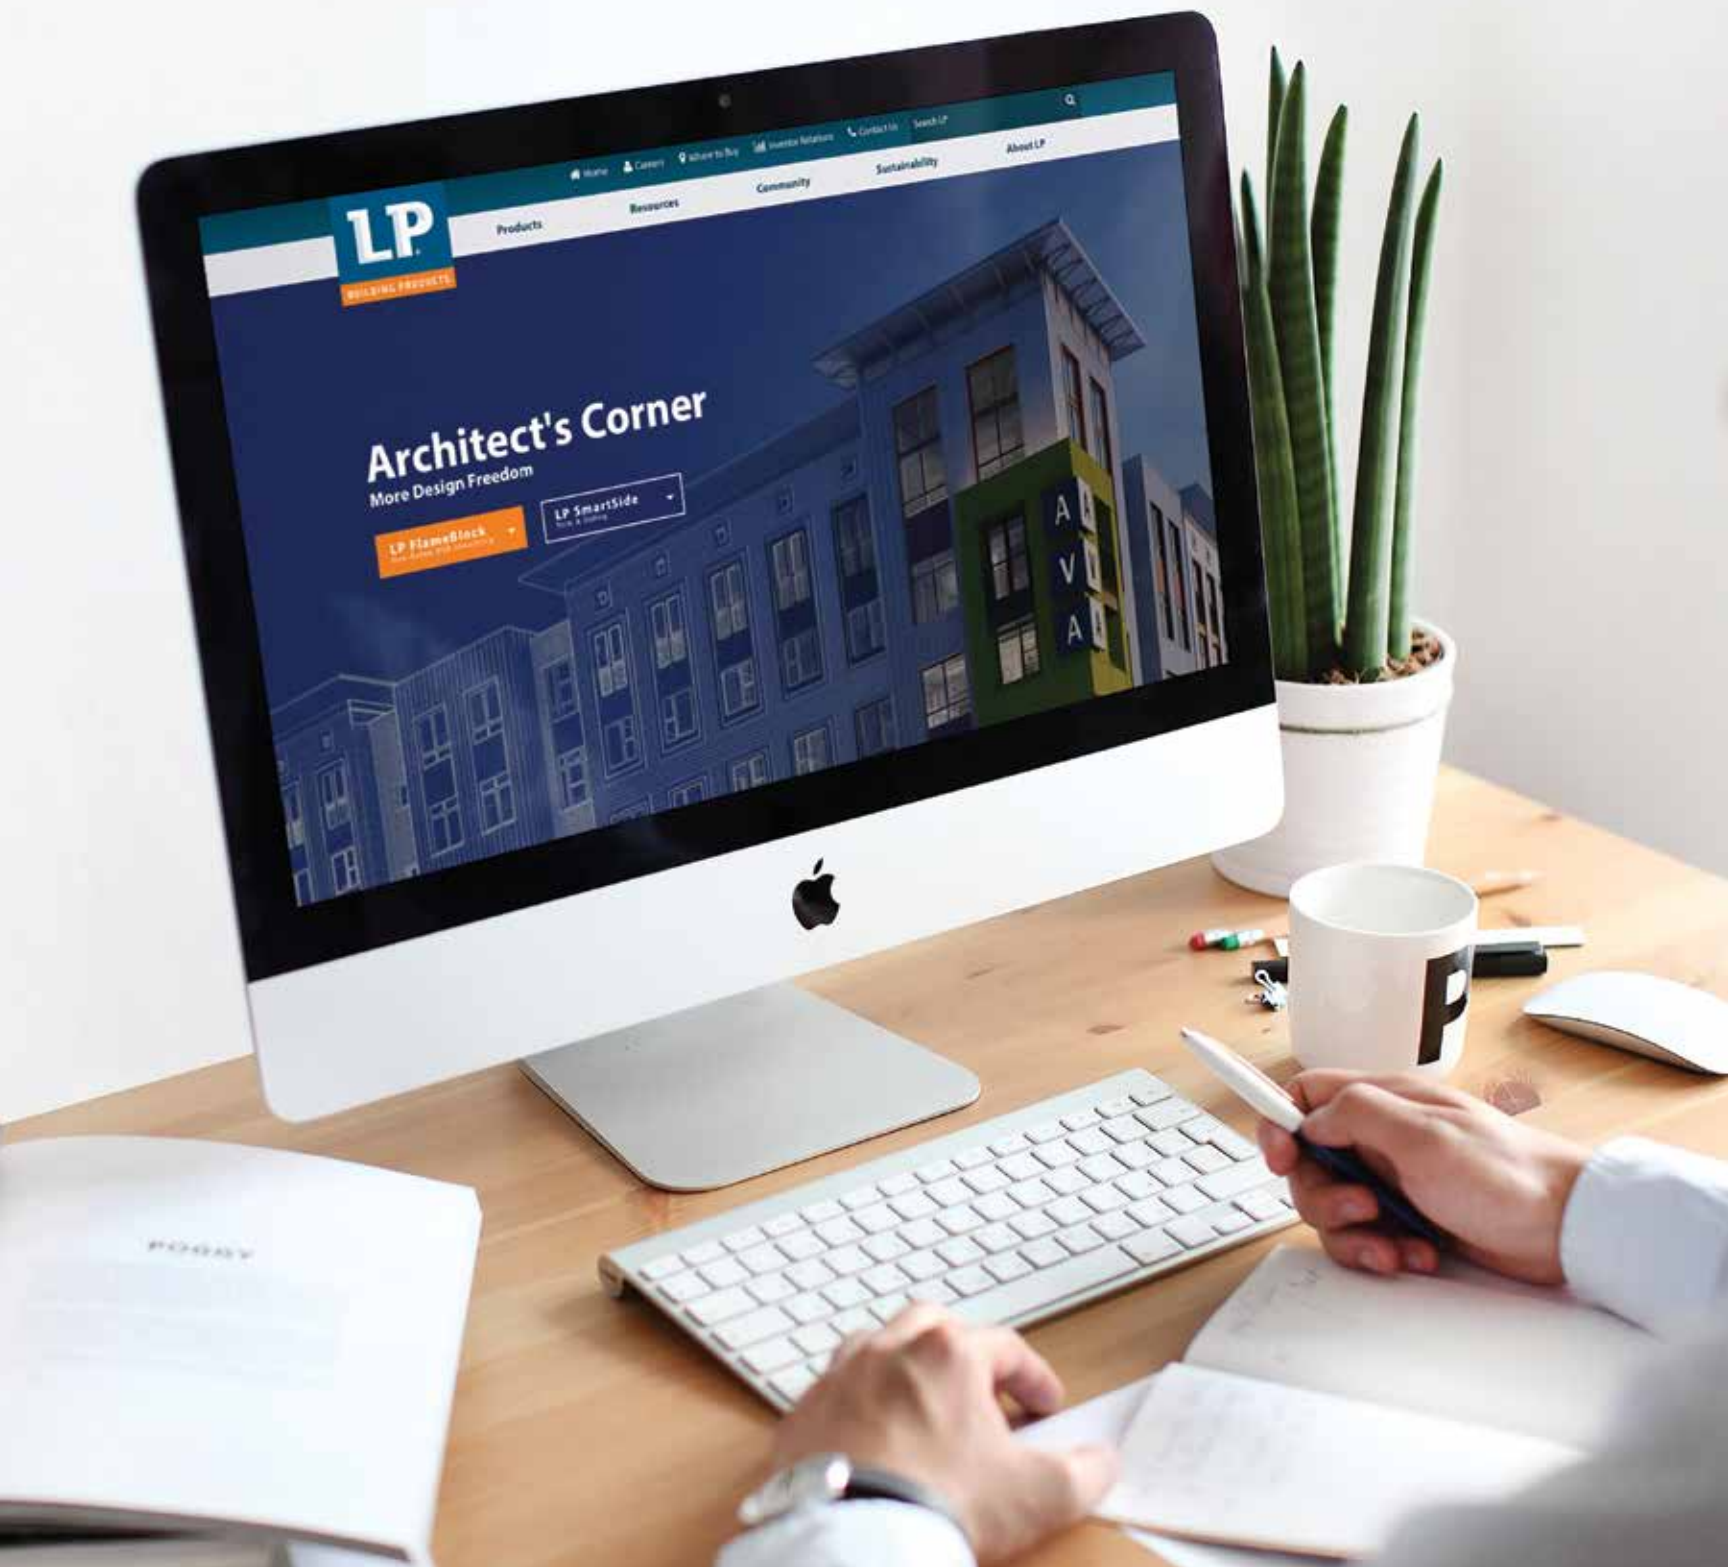

FOR SMARTSIDE® SPECS, WARRANTY, CASE STUDIES, AND PROJECT IMAGES, VISIT OUR ARCHITECT'S CORNER AT:

**[LPCORP.COM/RESOURCES/ARCHITECTS-CORNER](http://LPCORP.COM/RESOURCES/ARCHITECTS-CORNER)**




**CEDAR TEXTURE TRIM & FACIA**

- For use with many commercial and multi-family cladding options
- For interior or exterior use, including corner boards, windows and doors
- Narrow widths ideal for Board & Batten strips
- Larger widths provide versatile coverage options
- 16' lengths for faster installation and fewer seams
- Treated engineered wood strand substrate
- 5-/50-year Limited Warranty, including hail damage coverage\*




**190 SERIES CEDAR TEXTURE TRIM (STRAND)**




LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	2.50 in. (6.4 cm)	0.530 in. (14 mm)
16 ft. (192 in.)(4.9 m)	3.50 in. (8.9 cm)	0.530 in. (14 mm)
16 ft. (192 in.)(4.9 m)	5.50 in. (14.0 cm)	0.530 in. (14 mm)

**440 SERIES CEDAR TEXTURE TRIM (STRAND)**




LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	1.50 in. (3.8 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	2.50 in. (6.4 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	3.50 in. (8.9 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	4.50 in. (11.4 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	5.50 in. (14.0 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	7.21 in. (18.3 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	9.21 in. (23.4 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	11.21 in. (28.5 cm)	0.625 in. (16 mm)

**540 SERIES CEDAR TEXTURE TRIM (STRAND)**



LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	1.50 in. (3.8 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	2.50 in. (6.4 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	3.50 in. (8.9 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	4.50 in. (11.4 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	5.50 in. (14.0 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	7.21 in. (18.3 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	9.21 in. (23.4 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	11.21 in. (28.5 cm)	0.910 in. (23 mm)

**440 SERIES CEDAR TEXTURE PLOUGHED FACIA (STRAND)**

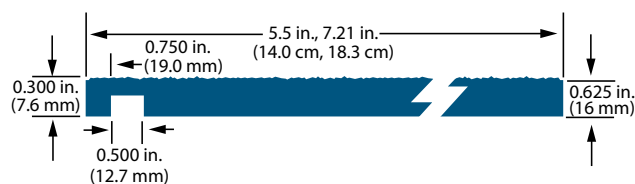

LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	5.50 in. (14.0 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	7.21 in. (18.3 cm)	0.625 in. (16 mm)

\*The full warranty and exclusions can be found at [LPCorp.com](http://LPCorp.com).


# REVERSIBLE TRIM

## REVERSIBLE TRIM

- Two great looks in one: rough on one side, smooth on the other
- 1/8" bevel cut on cedar texture side, square cut on the smooth side
- For interior or exterior use, including corner boards, windows and doors
- 16' lengths and fewer seams
- Treated engineered wood fiber substrate
- 5-/50-year Limited Warranty, including hail damage coverage\*



### 440 SERIES REVERSIBLE TRIM (FIBER)



LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	2.70 in. (6.9 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	3.50 in. (8.9 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	5.50 in. (14.0 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	7.21 in. (18.3 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	9.21 in. (23.4 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	11.21 in. (28.5 cm)	0.625 in. (16 mm)
16 ft. (192 in.)(4.9 m)	15.47 in. (39.3 cm)	0.625 in. (16 mm)

### 540 SERIES REVERSIBLE TRIM (FIBER)



LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS
16 ft. (192 in.)(4.9 m)	3.50 in. (8.9 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	4.50 in. (11.4 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	5.50 in. (14.0 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	7.21 in. (18.3 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	9.21 in. (23.4 cm)	0.910 in. (23 mm)
16 ft. (192 in.)(4.9 m)	11.21 in. (28.5 cm)	0.910 in. (23 mm)

**EXPLORE MORE.**

TO SEE OUR COMPLETE LINE OF CLADDING PRODUCTS,  
VISIT [LPCORP.COM](http://LPCORP.COM).

\*As part of this coverage, LP warrants that its LP SmartSide products will resist damage from hail when properly installed and maintained according to the LP application instructions in effect at the time of installation. Damage under this Hail Damage Limited Warranty is defined as a crack, chip or dent in the surface overlay exceeding 3/8 inch in length or diameter.



## **EXTREME PROTECTION IN TOUGH CLIMATES.**

Exterior cladding is often subjected to extreme temperatures, moisture and termites. That's why all LP® SmartSide® products feature our exclusive SmartGuard® process. Only SmartGuard offers four components of protection against termites and fungal decay.

## **TREATED TO THE CORE.**

Every LP SmartSide product is treated to the core with an advanced formula of binders, waxes and zinc borate before being bonded with a water-resistant, resin-saturated overlay. This process helps keep out moisture for long-term durability and strength against harsh weather.

### **LP SMART FACT:**

Zinc borate is safely used in household items including paper, carpet and paint.

If you're looking for the perfect combination of beauty and durability, look no further than LP® SmartSide® products. Our treated engineered wood products make a stunning first impression. Because they are designed to withstand weather, they will make a lasting impression for years to come.

## TREATED ENGINEERED WOOD CLADDING



To talk to an LP Architectural Sales Manager today, call 1-888.820.0325 or email [Marketing.Center@LPCorp.com](mailto:Marketing.Center@LPCorp.com).

*Phones are attended Monday through Friday between 8:30 am and 5:00 pm EST. Emails are answered Monday through Friday between 8:00 am and 4:30 pm EST.*

Phone: 1-888-820-0325  
Email: [Marketing.Center@lpcorp.com](mailto:Marketing.Center@lpcorp.com)



---

Cal. Prop 65 Warning: Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

---

SmartGuard is a registered trademark of Louisiana-Pacific Corporation. All other trademarks are owned by Louisiana-Pacific Corporation. Specifications subject to change without notice. SFI is a registered trademark of Sustainable Forestry Initiative, Inc.